



9419 ANN ST. SANTA FE SPRINGS, CA. 90670 562-946-1907 (FAX) 562-946-5637

Part# 804087
2007 Lincoln MKZ Billet Grille
Installation Instructions

Hardware Kit: (6) Speed Clips (6) #8 Screws

Step 1: Remove the outer bolts that hold the plastic filler in place. Figure 1



Figure 1

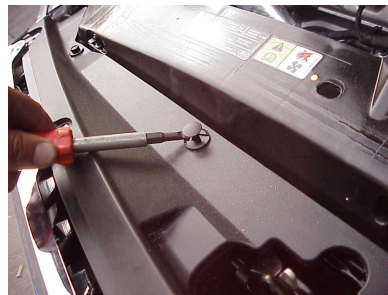


Figure 2

Step 2: Using a screwdriver remove the remaining plastic clips that hold the filler panel in place. Figure 2

Step 3: Once all of the bolts and clips have been removed it is now time to remove the plastic filler panel.

Step 4: Remove the screws that hold the upper portion of the factory grille shell in place.

Step 5: The nuts on the lower backside of the factory grille shell will need to be removed. Now the factory grille shell can be removed from the vehicle.

Step 6: Tape off the face of the grille shell to protect the surface during the installation of the billet grille.

Step 7: Using a die grinder or pneumatic saw cut out the center section of the factory grille shell. Figure 3&4

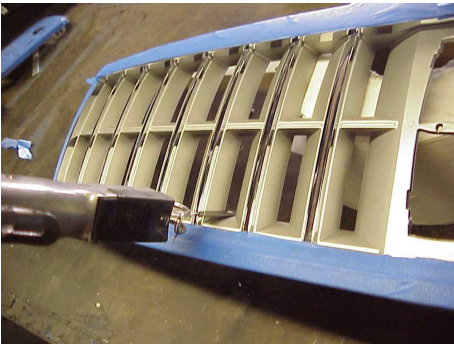


Figure 3

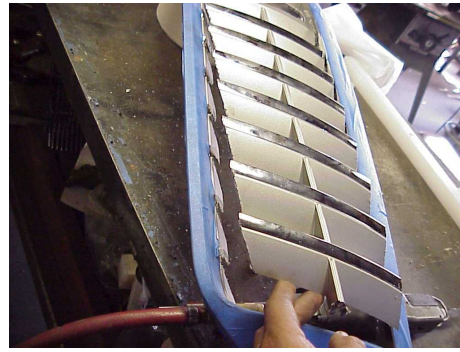


Figure 4

Step 8: After cutting it may be necessary to use a file or small sander to smooth out the rough edges left from cutting. Figure 5



Figure 5

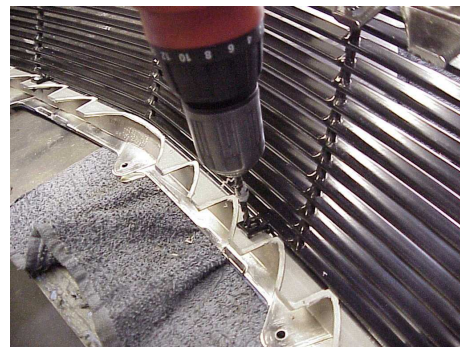


Figure 6

Step 9: Center the billet grille into the factory grille shell and mark and drill the upper mounting holes. Figure 6

Step 10: Attach the upper portion of the billet grille to the factory grille shell using the supplied clips and screws.

Step 11: Mark and drill the lower mounting holes.

Step 12: Attach the lower portion of the billet grille to the factory grille shell using the supplied clips and screws.

Step 13: Reinstall the grille shell back onto the vehicle by reversing steps 5-1.

Installation Is Now Complete!!!!